


Serie KWG 120

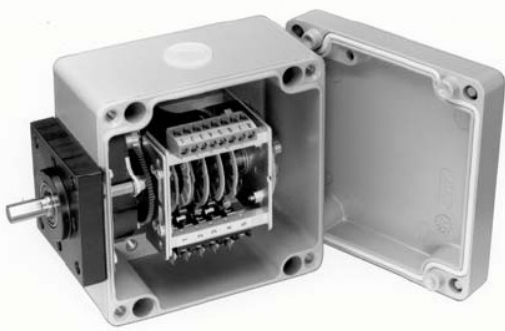

- **Programmkanäle** (einstellbar) 3 / 5
Program channel (free setting)
- **Eingangsübersetzungen** 1:1...2500 : 1
Input ratios
- **Mikroschalter** 4A 250V AC 1A 60V DC
Snap action switches
- **Schutzart** IP 64
Protection


Outline drawing

$\varnothing d = 9\text{-}h8$

$s = 8,5$

$F = \Rightarrow 40\text{ N } \Downarrow 80\text{ N}$

MS = Montagefläche / Mounting surface

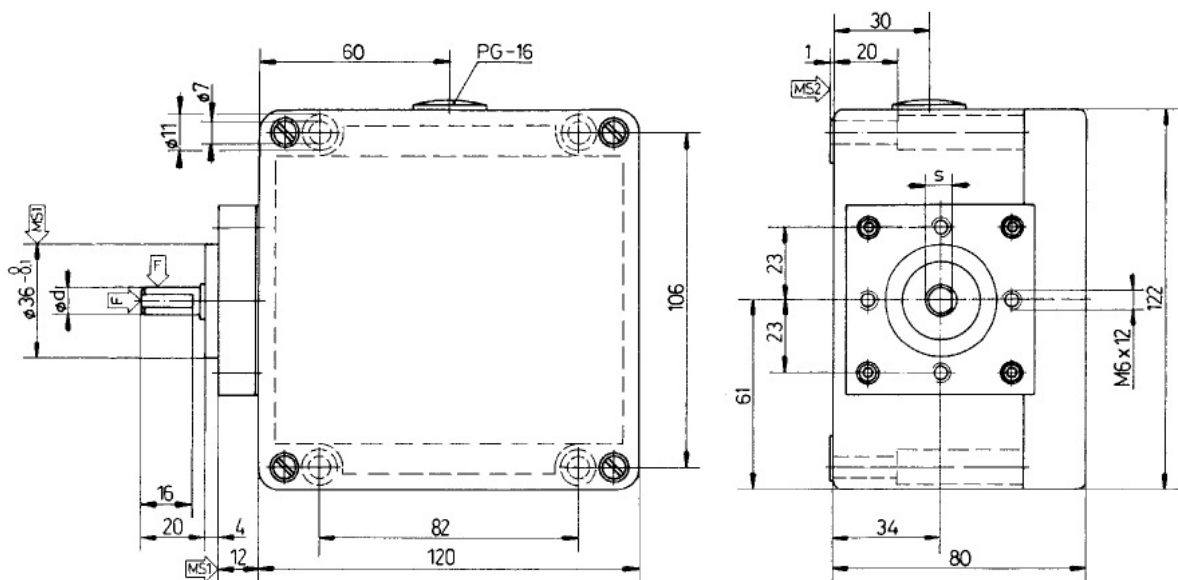

Serie KWG 120

Order key

KWG120 **3** **U1** **1**

Alu-diecasting / Colour (RAL 7001 grey)

Switches:

- 3 Switches (KS25B4 or KS26B4)
- 3** = 3 Program channels free setting (NK4201)
Indicator scale S360 (0°... 360°)

- 5 Switches (KS25B4 or KS26B4)
- 5** = 5 Program channels free setting (NK4201)
Indicator scale S360 (0°... 360°)

Input ratios (Shaft to switches): --> U = one stage; M = more stage

U1 = 1:1	M1 = 12,5:1
U2 = 1,25:1	M2 = 20:1
U3 = 1,5:1	M3 = 25:1
U4 = 2:1	M4 = 37,5:1
U5 = 2,6:1	M5 = 40:1
U6 = 2,75:1	M6 = 52,5:1
U7 = 3,5:1	M7 = 75:1
U8 = 4:1	M8 = 100:1
U9 = 5:1	M9 = 200:1
U10 = 6,5:1	M10 = 300:1
	M11 = 420:1
	M12 = 600:1
	M13 = 750:1
	M14 = 1600:1
	M15 = 2250:1
	M16 = 2500:1

Interface:

- 0** = -
- 1** = MR 265

Comment:

Standard wiring set (included):

- Screw terminal to 2,5 mm²
- Cable (AWG 22); incl. 2 x flat connector